



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 11/00	A2	(11) International Publication Number: WO 99/59375 (43) International Publication Date: 18 November 1999 (18.11.99)
(21) International Application Number: PCT/EP99/03085 (22) International Filing Date: 5 May 1999 (05.05.99) (30) Priority Data: 981028 8 May 1998 (08.05.98) FI (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: AUVINEN, Jussi, Antero; Munterinkatu 12 A 6, FIN-20360 Turku (FI). TOIVONEN, Marko, Johannes; Pormestarinkatu 8 I 75, FIN-20750 Turku (FI). (74) Agent: BORENIUS & CO. OY AB; Kansakoulukuja 3, FIN-00100 Helsinki (FI).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: SERVICE PROVIDER ACCESS METHOD AND APPARATUS (57) Abstract <p>A method of providing access for a subscriber terminal (8) to services of an Internet Service Provider (ISP, 6) through the Internet (1). The terminal (8) is connected to the Internet (1) via an Internet Access Server (IAS, 8) and transmits a log-on request to a node (9) in the Internet (1). The node (9) comprises a database (11) containing authentication data relating to subscribers of a home network which controls the node (9). The terminal (8) is authenticated using the database (11) and authentication data is returned to the terminal (8). Part of the authentication data is then transmitted from the terminal (8) to the ISP (6), which in turn transmits an authentication request to the authentication node (9). The node (9) returns an authorisation to the ISP (6) and, in response, the ISP (6) allows the subscriber terminal (8) to access its services.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SERVICE PROVIDER ACCESS METHOD AND APPARATUS

Field of the Invention

5 The present invention relates to a service provider access method and apparatus and in particular, though not necessarily, to the collection of charge data for accessing an Internet service provider via the Internet.

10 Background to the Invention

The conventional way for a home user of a personal computer (PC) to access the Internet is to set up a telephone call, via his telephone operator provided with
15 a modem pool, to an Internet service provider. The service provider allocates an Internet address to the PC ("subscriber terminal") for the duration of a session and acts as a router and protocol converter for data transmitted between the Internet and the subscriber
20 terminal.

More recently, it has been proposed to combine the functionality of the Internet service provider into certain exchanges of the telephone network. An
25 advantage of this is that the subscriber need only receive a single bill for both telephone calls and Internet access.

Exchanges provided with this facility are accessed by
30 subscribers dialing a predefined access number. The exchanges contain intelligence (sometimes described as an "intelligent network") which enables them to recognise that a call received to this number is an Internet access request. In response, the exchange
35 provides a connection between the subscriber terminal (or rather "line") and the Internet via one of a number

of so-called Internet Access Servers (IASs) -
alternatively known as Network Access Servers (NASs).
An IAS acts as a multiplexer/demultiplexer between a
number of low capacity subscriber lines and a high
5 capacity trunk line connecting to the Internet. The IAS
also acts as a protocol converter, converting the
circuit switched protocol of the telephone network into
a packet Internet protocol and vice versa. In the case
of digital cellular telephone networks (e.g. the Global
10 System for Mobile Communications), an IAS may be
accessed from a mobile terminal using a special
signaling protocol to set up a data channel between the
IAS and the mobile terminal.

15 It is often the case that a subscriber connects, via the
Internet, to some remote Internet Service Provider (ISP)
- sometimes referred to as a "content provider" - who
offers chargeable services to the subscriber, or with
whom orders for products may be placed. In this case,
20 it is possible to transmit charging information from the
ISP to the IAS and through that to the billing
coordinator of the access network.

This solution to the problem of providing a subscriber
25 with a single bill covering both telephone and Internet
services works satisfactorily providing that the
subscriber only wishes to access the Internet via his
own or "home" telephone network. More and more however,
subscribers are demanding service mobility - the ability
30 to access the Internet from various geographical
locations not covered by the home network but instead
where Internet access is available via some other means
(e.g. the telephone network of some "foreign" operator
or a local area network). This is particularly true in
35 the case of mobile cellular telephone subscribers who

may be able to roam across national borders with a single piece of communication hardware.

In order to meet this demand for mobility and for the
5 amalgamation of charges into a single bill, it is
necessary to provide firstly for the authentication of
subscribers attempting to access the ISP via a visitor
telephone network, and secondly for the repatriation of
charging information to the subscribers' home telephone
10 networks.

Summary of the Invention

It is an object of the invention to overcome or at least
15 mitigate the disadvantages of known Internet charging
systems *vis-à-vis* the combining of telephone and
Internet charging data whilst providing for subscriber
mobility.

20 According to a first aspect of the present invention
there is provided a method of providing access for a
subscriber to services of a service provider through a
data network, the subscriber being a subscriber of a
home interface network, the method comprising the steps
25 of:

connecting a subscriber terminal to said data
network;

transmitting a log-on request for the subscriber
terminal from the terminal to a node in the data
30 network, said node having a data network address and
comprising a database containing authentication data
relating to subscribers of the home interface network
which controls said node;

authenticating the subscriber terminal using the
35 data contained in said database and returning
authentication data to the subscriber terminal;

transmitting at least part of the authentication data from the subscriber terminal to the service provider;

transmitting an authentication request from the service provider to the authentication node, and
5 returning an authorisation to the service provider; and

in response to receipt of authorisation from the authentication node, allowing the subscriber terminal to access services of the service provider via the data
10 network.

As the node comprising the authentication database is controlled by the home network, the node can be trusted to provide secure authentication data to the
15 interrogating service provider.

Embodiments of the present invention enable the authentication of a subscriber terminal connected to the data network and hence the confirmation of the right of
20 the service provider to charge the subscriber terminal for the right to access its services. Charging information may then be repatriated to the subscriber terminal's home network where it may be incorporated into a single charging system maintained by the home
25 network.

Preferably, the data network is the Internet and said node is an Internet node having an Internet Protocol (IP) address, e.g. a Universal Resource Locator (URL)
30 address. More preferably, the home network comprises a telecommunication network, such as a Public Switched Telephone Network (PSTN) having an Internet access server or a modem pool. Alternatively, the telecommunication network may be a cellular radio
35 telephone network having a direct access gateway.

The subscriber terminal may be connected to the data network via a visitor network comprising a PSTN and an access server or modem pool, similar to the home network. Alternatively, connection to the data network
5 may be through a local area network and an Internet access server.

The database of the authentication node may contain the home number of the subscriber (A-number), together with
10 a Username and a password. Said log-on request then contains the Username and password which are verified by the node, together with a network address allocated to the subscriber terminal in the data network.

15 The authentication data returned to the subscriber terminal preferably comprises an access computer program and a user identification (UID). This computer program may be in the form of an applet which causes the subscriber terminal to transmit, at regular intervals, a
20 confirmation message to the authentication node. At least the UID is then transmitted from the subscriber terminal to the service provider. The service provider polls the network node, using the terminal's network address and UID to confirm the continued authorisation
25 of the terminal.

In an embodiment of the invention, the home network has control of a second node in the data network, which node also has an address in that network and acts as a
30 collector of charging information for the service provider. More preferably, the authentication node records charging data for the subscriber terminal and subsequently transfers this to the charging node.

35 In an alternative embodiment of the invention, the service provider has permission to access a second authentication node controlled by said visitor network

- or another "foreign" network. The method comprises the further step of transmitting an authentication request on behalf of the subscriber terminal to the second authentication node. When the "home" node has verified
- 5 that the terminal is a subscriber of said home network, the second authentication node communicates with the home authentication node, to both authenticate the subscriber terminal and to receive subscriber identity data, e.g. the subscriber's telephone number (A-number).
- 10 The second authentication node then transfers charging data to a charging node of the service provider. The charging node of the service provider can then forward charging information to the charging node of the home network.
- 15 Individual charging requests may be made from the charging node of the service provider to the authentication node of the home network. These requests may then be referred by the authentication node of the
- 20 home network to the subscriber terminal for approval or rejection. The decision of the subscriber terminal is then transferred back to the service provider's charging node via the home network's authentication node.
- 25 According to a second aspect of the present invention there is provided apparatus for providing access for a subscriber to services of a service provider through a data network, the subscriber being a subscriber of a home interface network, the apparatus comprising:
- 30 connection means for connecting a subscriber terminal to a data network;
- a data network node having a data network address and comprising a database containing authentication data relating to subscribers of the home interface network
- 35 which controls said node;

first transmission means for transmitting a log-on request for the subscriber terminal from the terminal to said node;

means for authenticating the subscriber terminal
5 using the data contained in said database and for returning authentication data to the subscriber terminal;

second transmission means for transmitting at least part of the authentication data from the subscriber
10 terminal to the service provider;

third transmission means for transmitting an authentication request from the service provider to the authentication node, and returning an authorisation to the service provider; and

15 processing means arranged, in response to receipt of authorisation from the authentication node, to allow the subscriber terminal to access services of the service provider via the data network.

20

Brief Description of the Drawings

For a better understanding of the present invention and in order to show how the same may be carried into effect
25 reference will now be made, by way of example, to the accompanying drawings, in which:

Figure 1 shows schematically an Internet access network;

Figure 2 is a flow diagram illustrating the method
30 of operation of the network of Figure 1; and

Figure 3 shows schematically a first modification to the network of Figure 1.

Detailed Description of Embodiments

35

With reference to Figure 1, there is illustrated an Internet access network in which the Internet is

identified by the reference numeral 1. Point-to-point connections (i.e. logical connections) made via the Internet 1 are identified by dashed lines whilst physical connections are identified by solid lines. A terminal (e.g. personal computer) 2 is a subscriber of a public switched telephone network (PSTN) 3 and is connected thereto by a modem (not shown) and a subscriber line 4. This PSTN 3 is referred to hereinafter as the "home" network of the subscriber terminal 2. By calling a predefined access number (B-number) the subscriber terminal 2 is able to gain access to the Internet 1 through an Internet access server (IAS) 5 operated by the operator of the PSTN 3. The IAS 5 provides appropriate protocol conversion (i.e. between circuit-switched and packet-switched data transmission) for data transfer between the Internet 1 and the subscriber terminal 2.

As Internet communications for the subscriber terminal 2 are handled by the home network's own IAS 5, the home network is able to combine charges made for the Internet access, with normal telephone charges. The operator is therefore able to issue the subscriber with a single bill covering both services. Furthermore, if the subscriber terminal 2 accesses a remote Internet Service Provider (ISP) 6 which levies a charge for the service provided, charging information may be returned to the home network 3 for incorporation into this same bill.

Consider now the situation where the subscriber connects to the Internet via an IAS 7 of a local area network (LAN - not shown in Figure 1) and not through his home network. This situation is illustrated in Figure 1 where the subscriber terminal is indicated by the reference numeral 8. Before the subscriber terminal can gain access to the ISP 6, an authentication and

authorisation procedure must be completed. This makes use of a first Internet node 9, termed a Datanet User Service DataBase (DUSDB), and a second Internet node 10, termed an Internet Billing Coordinator (IBC). Both of these nodes 9,10 have assigned thereto respective IP addresses such that they represent end-points for data packets tunneled via the Internet. The IP address of the DUSDB 9 is in the form of a Universal Resource Locator (URL) address.

10

The DUSDB 9 is provided with a database 11 containing the following tables (further explanation of the table fields is given below):-

- 15 1. Subscriber telephone numbers in the home network (A-number), a username, and a user password. This information is used for subscriber authentication.
- 20 2. Connection start time, connection disconnect time, disconnect method, username, random part of UID, originating IP address. This table is used to store log data from subscriber login and logout sessions.
- 25 3. Connection start time, username, UID, originating IP address, latest verification time. This table is used to enhance system performance. It is used to store information after login and before logout. Upon logout, the information is transferred to table 2 and missing fields are inserted there. The latest verification time is the time that the most recent verification was received from the user applet.
- 30 4. ISP IP address, request time, UID. This table contains information on every query made by an ISP to the DUSDB.
- 35

The DUSDB 9 and the IBC 10 are both under the control of the home network 3 and can therefore be considered as secure.

5 In the procedure to be described below, communications between the ISP 6, the DUSDB 9, and the IBC 10, require that the identity of the transmitting and receiving identity be confirmed. This is achieved using an authentication protocol such as Radius. Communications
10 made using this protocol are indicated in Figure 1 by the symbol Δ . Other communications over the Internet can be made using the https protocol, indicated in Figure 1 by the symbol Φ .

15

The first stage in granting the subscriber terminal 8 access to the ISP 6, involves the subscriber terminal 8 logging on to the DUSDB 9. This requires the subscriber terminal to request from the IAS 7 an Internet protocol
20 (IP) address. Logging on is achieved in a similar manner to that used for gaining Internet access to bank services. The user first enters the URL of the DUSDB 9 and then sends to the DUSDB 9 the terminal's username and (changing) password. When the DUSDB 9 has confirmed
25 the identity of the subscriber, the DUSDB 9 sends an applet to the subscriber terminal 8, together with a user identification (UID). The applet is installed in the subscriber terminal 8 and causes the terminal to send a confirmation message to the DUSDB 9 at regular
30 intervals, e.g. every one minute. If this message is not received by the DUSDB 9 within a certain time frame, the user is logged off from the DUSDB 9. For a general introduction to applets, see for example "Java in a Nutshell", David Flanagan, 2nd Ed, Chapter 6 (ISBN 1-
35 56592-262-X).

When the subscriber terminal 8 has successfully logged on to the DUSDB 9, the terminal makes an https connection to the ISP 6. The ISP 6 then contacts the DUSDB 9, using the terminal's IP address and UID, to confirm whether or not the subscriber terminal 8 is logged on to the DUSDB 9. A confirmation message is returned to the ISP 6 by the DUSDB 9, and the ISP grants access to the terminal 8.

10

In the event that the applet generated message is not sent to the DUSDB 9 within the required time frame, the DUSDB logs off the subscriber terminal 8, and sends a message to this effect to the ISP 6 which terminates the subscriber terminal's access.

15

The operation of the network of Figure 1 is illustrated by the flow chart of Figure 2.

The solution to providing a single bill for telephone and ISP access of Figure 1 works satisfactorily providing that the ISP 6 has an appropriate agreement with the subscriber's home network 3. If this is not the case, then means must be provided for enabling the operator of the ISP 6 to collect charging information, including subscriber identity information, so that the operator can bill the home network 3 for services used. The home network 3 may then pass on the charges to the subscriber using its own charging system.

25

30

A network for achieving this solution is illustrated schematically in Figure 3, where elements already discussed with reference to Figure 1 are identified with like reference numerals (the subscriber's home network is omitted in the interest of simplicity). The network makes use of communication between the DUSDB 9 controlled by the home network and a second DUSDB 12.

35

The second DUSDB 12 is under the control of a foreign network, with the ISP 6 having a suitable agreement with that network such that the ISP 6 has permission to connect to and use the services of the DUSDB 12.

5

- As described with reference to Figures 1 and 2, the subscriber 8 starts by logging on to the DUSDB 9 of the home network using his Username and password, and receives therefrom an applet and UID. When the
- 10 subscriber 8 subsequently requests access to the ISP 6, the ISP 6 communicates with its own trusted DUSDB 12 and recognises that the subscriber 8 does not have an account with the ISP 6 and moreover that the ISP 6 does not have an appropriate service agreement with the home
- 15 network 3. The ISP DUSDB 12 then contacts the home DUSDB 9 and receives therefrom all data necessary for billing the subscriber 8, including the subscriber's home telephone number (A-number).
- 20 The foreign network has its own IBC node 13, which receives the necessary billing information from the network's DUSDB 12. When the subscriber's connection is terminated, the IBC 13 sends an Internet Charging Data Record (CDR) to the foreign network's billing system
- 25 (not shown) which in turn forwards a note of the charges to the home network's billing system.

- It will be appreciated by the person of skill in the art that modifications may be made to the above described
- 30 embodiments without departing from the scope of the present invention. For example, the network may include means for providing the subscriber with the opportunity to accept or reject individual charging requests made by the ISP 6. For each CDR generated by the IBC 13 in
- 35 response to one or more charging information packets received by it from the ISP 6, the IBC 13 requests
- authorisation from the home network's DUSDB 9. The

DUSDB 9 directs this request to the subscriber terminal 8 using the previously transferred applet. If the subscriber accepts the request, then an OK message is sent via the DUSDB 9 and the IBC 13 to the ISP 6.

5

Claims

1. A method of providing access for a subscriber to services of a service provider through a data network, the subscriber being a subscriber of a home interface network, the method comprising the steps of:
- connecting a subscriber terminal to said data network;
 - transmitting a log-on request for the subscriber terminal from the terminal to a node in the data network, said node having a data network address and comprising a database containing authentication data relating to subscribers of the home interface network which controls said node;
 - authenticating the subscriber terminal using the data contained in said database and returning authentication data to the subscriber terminal;
 - transmitting at least part of the authentication data from the subscriber terminal to the service provider;
 - transmitting an authentication request from the service provider to the authentication node, and returning an authorisation to the service provider; and
 - in response to receipt of authorisation from the authentication node, allowing the subscriber terminal to access services of the service provider via the data network.
2. A method according to claim 1, wherein the data network is the Internet and said node is an Internet node having a Universal Resource Locator (URL) address.
3. A method according to claim 2, wherein the home network comprises a telecommunication network, such as a Public Switched Telephone Network (PSTN) having an Internet access server or a modem pool.

4. A method according to any one of the preceding
claims and comprising connecting the subscriber terminal
to the data network via a visitor network comprising a
5 PSTN and an access server or modem pool.

5. A method according to any one of claims 1 to 3 and
comprising connecting the subscriber terminal to the
data network via a local area network and an Internet
10 access server.

6. A method according to any one of the preceding
claims, wherein said database of the authentication node
contains the address of the subscriber in the home
15 network, together with a Username and a password, and
said log-on request contains the Username and password
which are verified by the node, together with a network
address allocated to the subscriber terminal in the data
network.

20 7. A method according to any one of the preceding
claims, wherein the authentication data returned to the
subscriber terminal comprises an access computer program
and a user identification (UID), and at least the UID is
25 then transmitted from the subscriber terminal to the
service provider.

8. A method according to claim 7, wherein the service
provider polls the network node, using the terminal's
30 network address and UID to confirm the continued
authorisation of the terminal.

9. A method according to any one of the preceding
claims, wherein the home network has control of a second
35 node in the data network, which node also has an address
in that network and acts as a collector of charging
information for the service provider.

10. A method according to claim 9 and comprising recording at the authentication node charging data for the subscriber terminal, and subsequently transferring this data to the charging node.

5

11. A method according to any one of claims 1 to 8, wherein the service provider has permission to use the services of a second authentication node controlled by a foreign network, and the method comprises the steps of:

10 transmitting an authentication request on behalf of the subscriber terminal to the second authentication node;

when the second node has verified that the terminal is a subscriber of said home network, communicating
15 between the second authentication node and the authentication node of the home network, to both authenticate the subscriber terminal and to receive subscriber identity data;

transferring charging data to a charging node
20 accessible to the service provider from the second authentication node; and

forward charging information to the charging node of the home network from the charging node of the service provider.

25

12. A method according to claim 11 and comprising:

forwarding individual charging requests from the charging node of the service provider to the authentication node of the home network;

30 referring these requests to the subscriber terminal for approval or rejection; and

transmitting the decision of the subscriber terminal back to the service provider's charging node via the home network's authentication node.

35

13. Apparatus for providing access for a subscriber to services of a service provider through a data network,

the subscriber being a subscriber of a home interface network, the apparatus comprising:

connection means for connecting a subscriber terminal to a data network;

5 a data network node having a data network address and comprising a database containing authentication data relating to subscribers of the home interface network which controls said node;

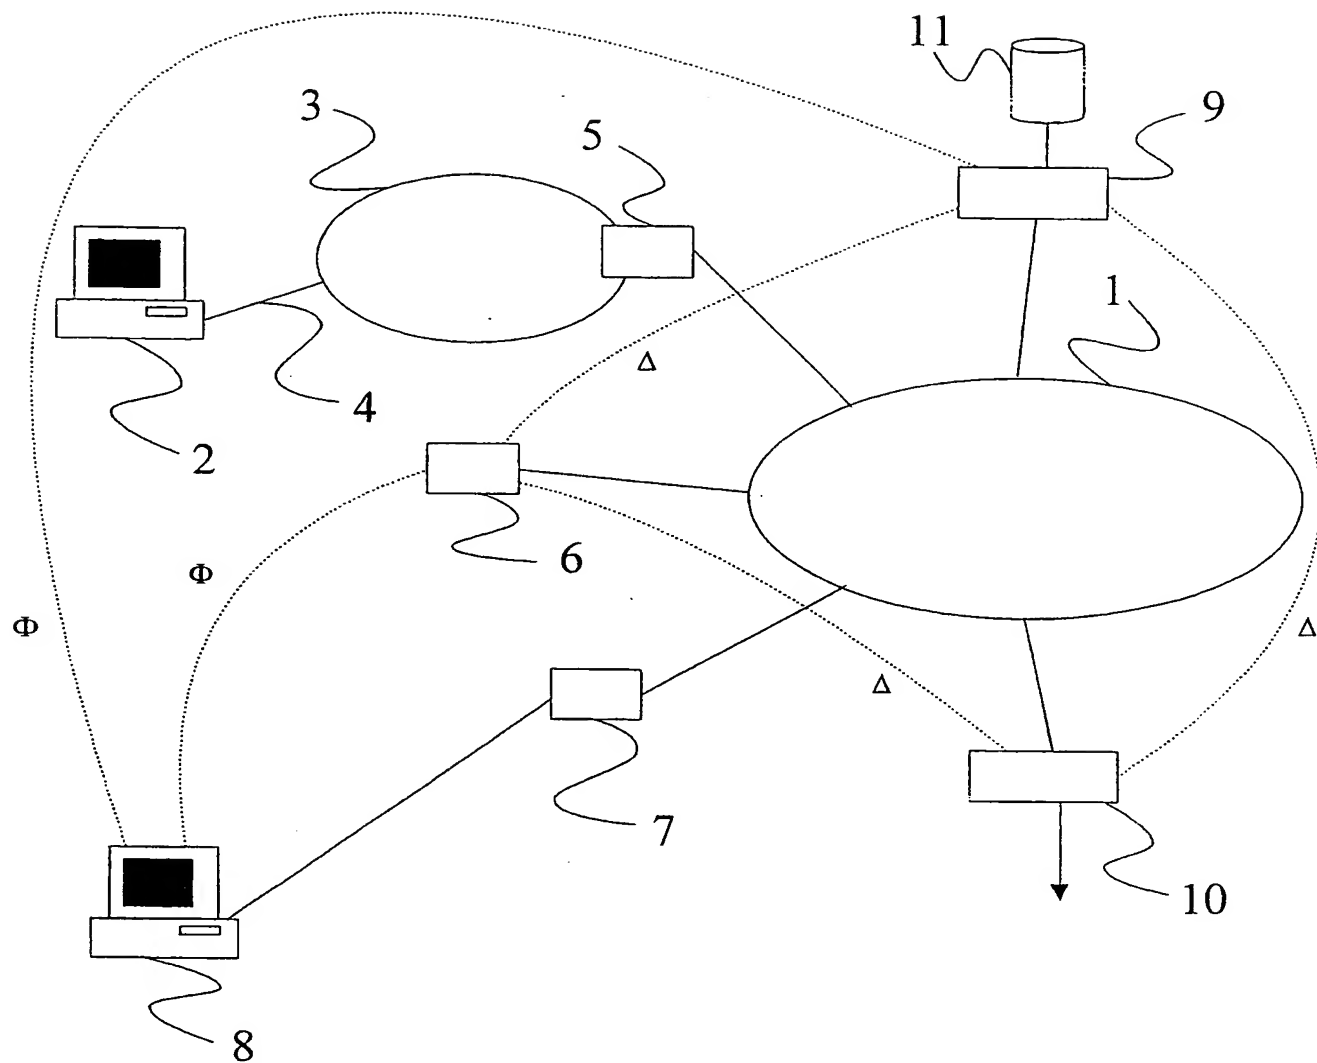
10 first transmission means for transmitting a log-on request for the subscriber terminal from the terminal to said node;

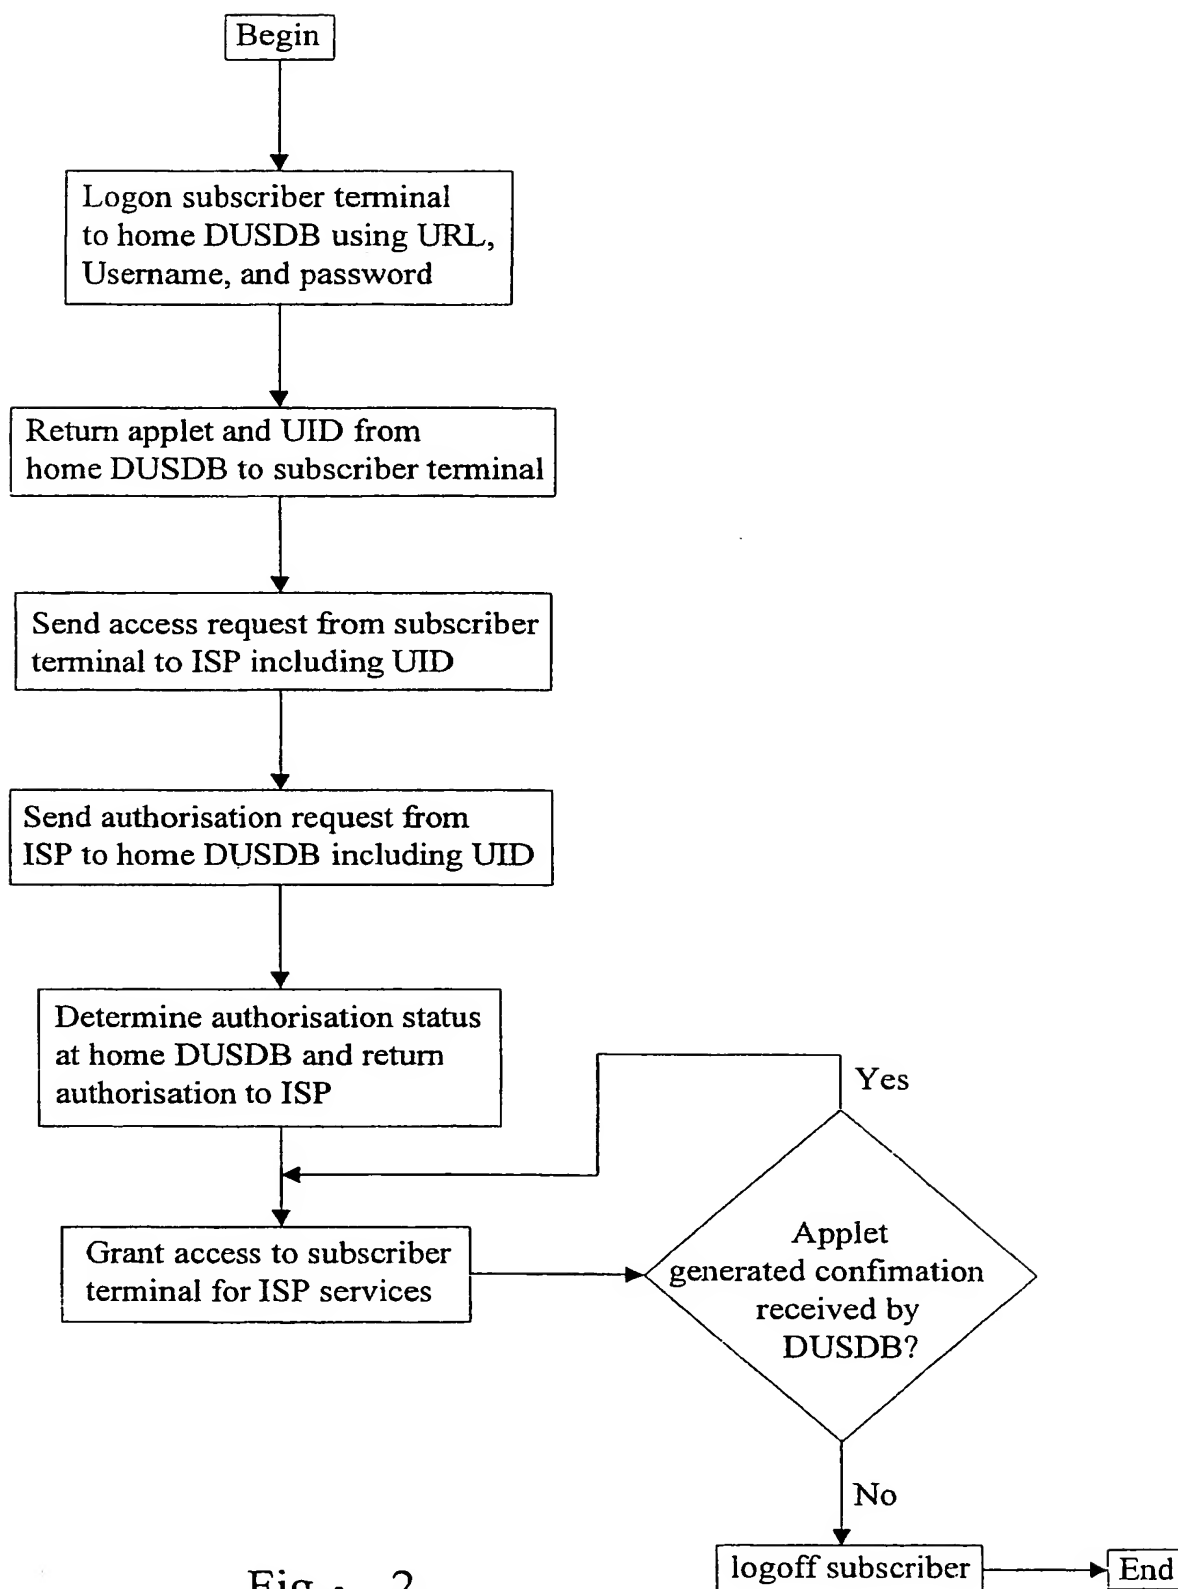
15 means for authenticating the subscriber terminal using the data contained in said database and for returning authentication data to the subscriber terminal;

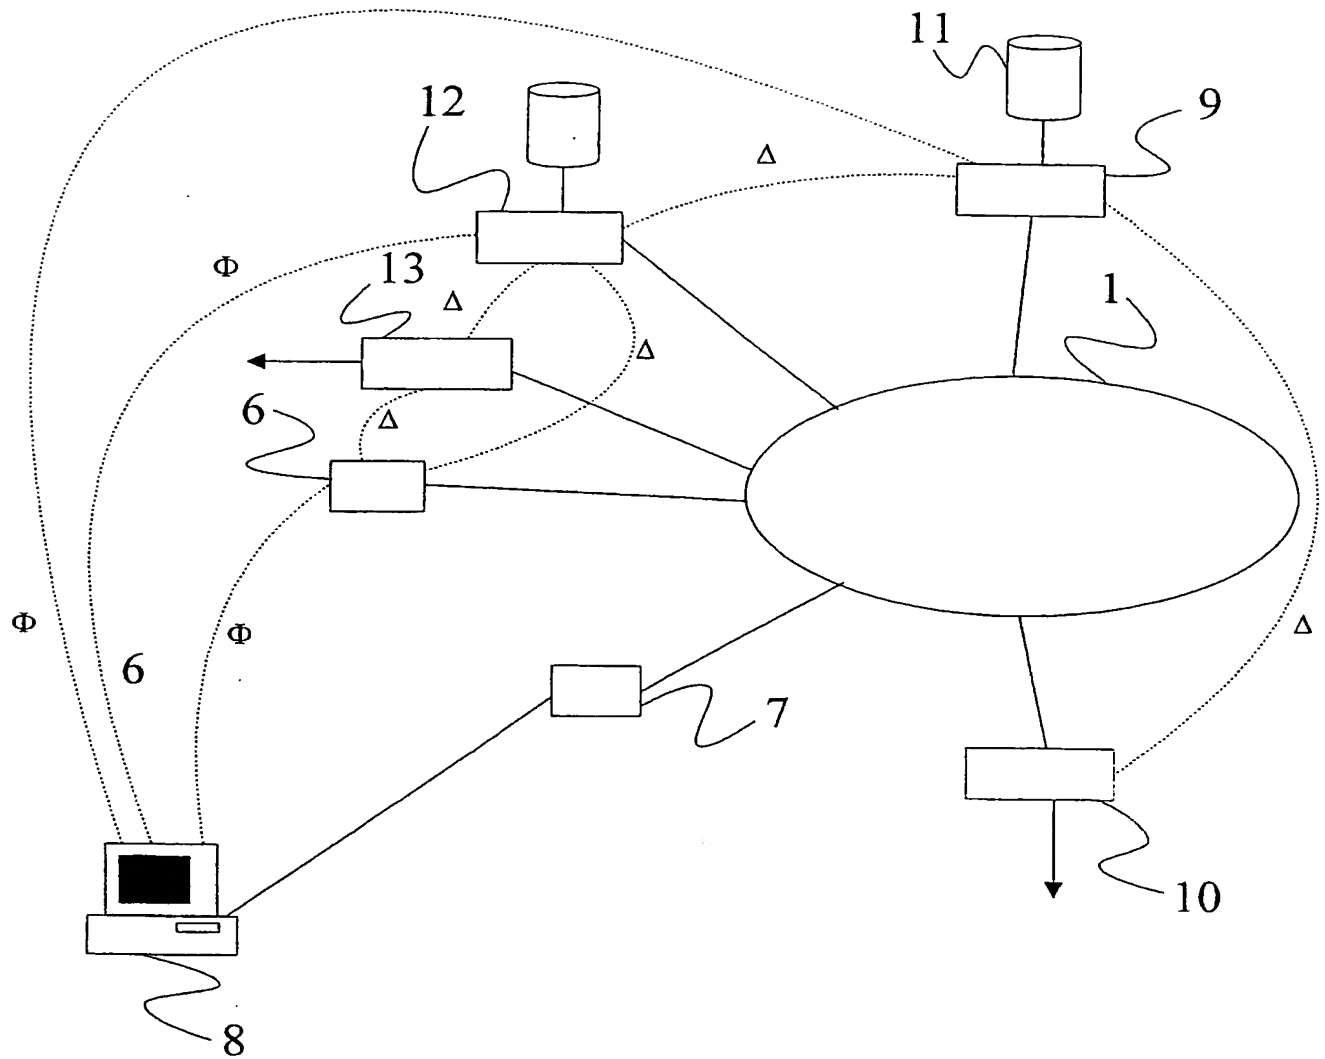
20 second transmission means for transmitting at least part of the authentication data from the subscriber terminal to the service provider;

25 third transmission means for transmitting an authentication request from the service provider to the authentication node, and returning an authorisation to the service provider; and

30 processing means arranged, in response to receipt of authorisation from the authentication node, to allow the subscriber terminal to access services of the service provider via the data network.

Fig. 1

Fig . 2

Fig. 3

<p>(51) International Patent Classification ⁶ : H04L 29/06, 12/14</p>	<p>A3</p>	<p>(11) International Publication Number: WO 99/59375</p> <p>(43) International Publication Date: 18 November 1999 (18.11.99)</p>
<p>(21) International Application Number: PCT/EP99/03085</p> <p>(22) International Filing Date: 5 May 1999 (05.05.99)</p> <p>(30) Priority Data: 981028 8 May 1998 (08.05.98) FI</p> <p>(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).</p> <p>(72) Inventors: AUVINEN, Jussi, Antero; Munterinkatu 12 A 6, FIN-20360 Turku (FI). TOIVONEN, Marko, Johannes; Pormestarinkatu 8 I 75, FIN-20750 Turku (FI).</p> <p>(74) Agent: BORENIUS & CO. OY AB; Kansakoulukuja 3, FIN-00100 Helsinki (FI).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> <p>(88) Date of publication of the international search report: 29 December 1999 (29.12.99)</p>

A method of providing access for a subscriber terminal (8) to services of an Internet Service Provider (ISP, 6) through the Internet (1). The terminal (8) is connected to the Internet (1) via an Internet Access Server (IAS, 7) and transmits a log-on request to a node (9) in the Internet (1). The node (9) comprises a database (11) containing authentication data relating to subscribers of a home network which controls the node (9). The terminal (8) is authenticated using the database (11) and authentication data is returned to the terminal (8). Part of the authentication data is then transmitted from the terminal (8) to the ISP (6), which in turn transmits an authentication request to the authentication node (9). The node (9) returns an authorisation to the ISP (6) and, in response, the ISP (6) allows the subscriber terminal (8) to access its services.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/03085

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04L29/06 H04L12/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 695 985 A (MICROSOFT CORP) 7 February 1996 (1996-02-07) page 2, left-hand column, line 4-26 page 2, right-hand column, line 38-52 column 1, line 42-51 column 3, line 48-58 column 5, line 37 -column 6, line 23 ---	1-13
A	WO 96 42041 A (OPEN MARKET INC) 27 December 1996 (1996-12-27) page 5, line 30 -page 6, line 22 page 7, line 32 -page 8, line 7 page 9, line 10-15 page 12, line 23 -page 13, line 8 page 14, line 30-33 page 16, line 29 -page 17, line 2 --- -/--	1-4, 6, 7, 9, 13

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"8" document member of the same patent family

Date of the actual completion of the international search

5 November 1999

Date of mailing of the international search report

15/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Dupuis, H

INTERNATIONAL SEARCH REPORT

International Application No

PC/EP 99/03085

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>STAINOV R: "DATENSICHERHEIT IM INTERNET: PRINZIPIEN, MOEGlichkeiten UND GRENZEN" NTZ NACHRICHTENTECHNISCHE ZEITSCHRIFT, vol. 49, no. 8, 1 January 1996 (1996-01-01), pages 32-34, 36 - 38,, XP000623476 ISSN: 0027-707X</p>	1,13

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 99/03085

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0695985 A	07-02-1996	JP 8106437 A	23-04-1996
		US 5757920 A	26-05-1998
WO 9642041 A	27-12-1996	US 5708780 A	13-01-1998
		US 5812776 A	22-09-1998
		AU 694367 B	16-07-1998
		AU 5936796 A	09-01-1997
		CA 2221506 A	27-12-1996
		EP 0830774 A	25-03-1998
		JP 11507752 T	06-07-1999

